



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 113 690 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
04.07.2001 Bulletin 2001/27

(51) Int Cl.7: H04Q 7/38

(21) Application number: 00128628.5

(22) Date of filing: 28.12.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: KABUSHIKI KAISHA TOSHIBA
Kawasaki-shi (JP)

(72) Inventor: Tada, Masahiro, c/o K. K. Toshiba
1-chome, Minato-ku Tokyo 105-8001 (JP)

(30) Priority: 28.12.1999 JP 37307399

(74) Representative: Henkel, Feller, Hänzel
Möhlstrasse 37
81675 München (DE)

(54) Communication apparatus and control method therefor

(57) A data traffic is monitored (S101), and the current traffic state is checked (S102, S103). If the traffic exceeds a threshold a , the time interval of Inquiry Scan is set to a maximum value $X1$ to prevent communication performance from deteriorating due to Inquiry Scan

(step S104). Likewise, if the traffic falls in the range of the threshold a to a threshold b , the time interval of Inquiry Scan is set to an intermediate value $X2$ (step S105). If the traffic amount is equal to or less than the threshold b , the time interval of Inquiry Scan is set to a minimum value $X3$ (step S106).

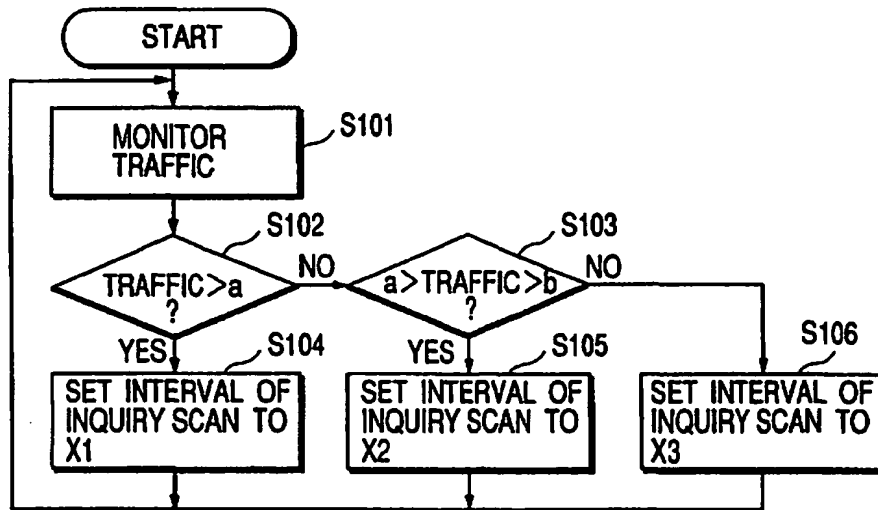


FIG. 9

Description

[0001] The present invention relates to a communication apparatus and a control method therefor and, more particularly, to a communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, and a control method therefor.

[0002] Conventionally, in information processing apparatuses such as personal computers (PCs) and personal digital assistants (PDAs), communication interfaces using infrared rays are used. According to IrDA as infrared communication standards, a search for a terminal in a communication zone is made every predetermined time interval before establishment of communication regardless of the state of the information processing apparatus. The time interval at which this terminal search is made is determined in advance, and a message for a terminal search is always broadcast every predetermined time interval even if the battery residual capacity becomes small.

[0003] Since a terminal as a communication partner is not always present in a communication zone, even if terminal search processing is indiscriminately performed every predetermined time interval, the communication partner may not be searched out. In this case, power is unnecessarily consumed. In a device that operates on a battery, in particular, if terminal search processing is indiscriminately performed every predetermined time interval, the battery driving time shortens accordingly.

[0004] In radio communication systems such as Bluetooth and HomeRF systems, which have recently received a great deal of attention, terminal search processing is generally performed every predetermined time interval. In these radio communication systems, a master can simultaneously connect to a plurality of slaves. For this reason, unlike IrDA, even if connection is being established, terminal search processing is periodically performed to search for a new terminal. In this case, since a communication channel for data transmission/reception and a control channel for terminal search processing or the like are exclusively assigned to a radio communication resource, if communication is being performed in performing terminal search processing, the communication is temporarily stopped. If, therefore, a terminal as a communication partner is not present in a communication zone, wasteful terminal search processing decreases the communication speed.

[0005] As described above, in the prior art, terminal search processing is performed every predetermined time interval, resulting in unnecessary consumption of power and a deterioration in communication processing performance.

[0006] Accordingly, it is an object of the present invention to provide a communication apparatus capable of improving communication performance and suppressing power consumption by dynamically optimizing pe-

rameters associated with connection control, and a control method therefor.

[0007] According to one aspect of the present invention, there is provided a communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, the apparatus comprising: means for executing data transmission/reception using the communication channel; means for executing a control procedure required for establishment of a radio link using the control channel; means for monitoring a traffic of the communication channel; and means for dynamically controlling an execution timing or execution time interval of the control procedure on the basis of the traffic detected by the monitoring means.

[0008] According to another aspect of the present invention, there is provided a communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, the apparatus comprising: means for executing data transmission/reception using the communication channel; means for executing a control procedure required for establishment of a radio link using the control channel; user interface means for setting preferentially related to one of the data transmission/reception and the control procedure in accordance with a user operation; and means for controlling an execution timing or execution time interval of the control procedure on the basis of a setting result of the user interface means.

[0009] According to still another aspect of the present invention, there is provided a communication apparatus capable of being driven by a battery and simultaneously connecting to a plurality of remote terminals, the apparatus comprising: means for periodically executing transmission processing of a terminal search message for searching for a remote terminal or terminal search wait processing for detecting the terminal search message and responding thereto; means for detecting a residual capacity of the battery; and means for dynamically controlling an execution timing or executing time interval of the transmission processing of the terminal search message or the terminal search wait processing on the basis of a detection result of the detection means.

[0010] According to still another aspect of the present invention, there is provided a control method for a communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, the method comprising the steps of: executing data transmission/reception using the communication channel and executing a control procedure required for establishment of a radio link using the control channel; monitoring a traffic of the communication channel; and dynamically controlling an execution timing or execution time interval of the control procedure on the basis of the traffic detected in the monitoring step.

[0011] According to still another aspect of the present

Invention, there is provided a control method for a communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, the method comprising the steps of: executing data transmission/reception using the communication channel and executing a control procedure required for establishment of a radio link using the control channel; setting preferentiality related to one of the data transmission/reception and the control procedure in accordance with a user operation; and controlling an execution timing or execution time interval of the control procedure on the basis of a setting result in the setting step.

[0012] According to still another aspect of the present invention, there is provided a control method for a communication apparatus capable of being driven by a battery and simultaneously connecting to a plurality of remote terminals, the method comprising the steps of: detecting a residual capacity of the battery; and dynamically controlling an execution timing or execution time interval of transmission processing of a terminal search message for searching for a remote terminal or terminal search wait processing for detecting the terminal search message and responding to the message on the basis of a detection result in the detecting step.

[0013] This summary of the invention does not necessarily describe all necessary features so that the invention may also be a sub-combination of these described features.

[0014] The invention can be more fully understood from the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a view showing the basic arrangement of a radio communication system according to an embodiment of the present invention;

FIG. 2 is a view for briefly explaining the overall radio communication system according to the embodiment;

FIG. 3 is a block diagram showing the hardware arrangement of a personal computer used as an information processing apparatus in the system according to the embodiment;

FIG. 4 is a block diagram showing the software arrangement of a personal computer used in the system according to the embodiment;

FIG. 5 is a block diagram showing the hardware arrangement of a portable telephone used in the system according to the embodiment;

FIG. 6 is a block diagram showing the software arrangement of a portable telephone used in the system according to the embodiment;

FIG. 7 is a block diagram showing the arrangements of a host and host controller which are applied to the personal computer in the system according to the embodiment;

FIG. 8 is a block diagram showing an arrangement around a bus driver on the host side in FIG. 7;

FIG. 9 is a flow chart showing a procedure for optimization control processing for a traffic amount, which is executed in the system according to the embodiment;

FIG. 10 is a flow chart showing a second procedure for optimization control processing for a traffic amount, which is executed in the system according to the embodiment;

FIG. 11 is a view showing an example of a user interface window used in the system according to the embodiment;

FIG. 12 is a view showing another example of the user interface window used in the system according to the embodiment;

FIG. 13 is a flow chart showing a procedure for optimization control processing corresponding to a user set mode, which is executed in the system according to the embodiment;

FIG. 14 is a block diagram for explaining the principle of power supply information acquisition processing in the system according to the embodiment;

FIG. 15 is a block diagram for explaining another example of the power supply information acquisition processing in the system according to the embodiment; and

FIG. 16 is a flow chart showing a procedure for optimization control processing corresponding to a power supply state, which is executed in the system according to the embodiment.

[0015] An embodiment of the present invention will be described below with reference to the views of the accompanying drawing.

[0016] FIG. 1 conceptually shows the basic arrangement of a radio communication system according to an embodiment of the present invention.

[0017] In the embodiment, there is provided a communication apparatus (information processing apparatus 1) in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used. The apparatus includes a unit for executing data transmission/reception using the communication channel and a unit for executing a control procedure required for establishment of a radio link using the control channel.

[0018] The information processing apparatus 1 is, for example, a notebook type personal computer (to be referred to as a PC hereinafter) that can be driven on a battery, and can communicate with a portable device such as a portable telephone 2 by establishing a local link thereto by radio. In a state where this radio link is established, a user can, for example, remotely control the PC 1 by using the portable telephone 2 and exchange data such as mail and personal information with the PC 1 and the portable telephone 2.

[0019] The PC 1 can be simultaneously connected to a plurality of remote terminals, e.g., the portable tele-

phone 2 and another PC (multipoint). In this case, even while connection is being established, the PC 1 can enter a terminal search mode of searching for a new terminal and can also enter a connection establishment request wait mode, which dynamically allows a new terminal to join the network.

[0020] In the terminal search mode, a search is made for a terminal that is preset in a range (communication zone) where radio waves can reach, and processing for the acquisition of information necessary for connection is performed. In this terminal search mode, a terminal search message is broadcast. In the terminal search wait mode, the terminal search message transmitted from a remote terminal to search for a terminal is detected, and processing for transmitting a message responding to the detected message is performed. In this connection establishment request wait mode, the connection establishment request message transmitted from the remote terminal is detected, and processing for the establishment of connection in response to the detected message is performed.

[0021] A message in a control procedure (terminal search, terminal search wait, and connection establishment request wait) required for new radio link establishment is exchanged by using a control channel. Since a radio communication resource is exclusively used between this control channel and a communication channel for data transmission/reception, if communication is being performed in making a terminal search or the like, the communication (communication mode) is temporarily stopped. This embodiment has a control information communication timing control section for dynamically controlling the timing at which a control procedure (terminal search, terminal search wait, and connection establishment request wait) necessary for the establishment of a new radio link is executed and the time interval of the control procedure in accordance with the traffic state of a communication channel, the current power supply state, and the like. With this control section, parameters associated with connection control can be optimized.

[0022] The overall radio communication system of this embodiment will be briefly described next with reference to FIG. 2.

[0023] The portable telephone 2 transmits/receives speech or data to/from base stations 3 for portable telephones, which are installed in various areas, by using radio waves in the 800-MHz band. The base station 3 encompasses a predetermined radio area, in which communication with the portable telephone 2 is implemented. A server 5 is connected to the base station 3 through a public switched telephone network 4. The user of the portable telephone 2 can also perform speech communication by using a headset 6.

[0024] This portable telephone 2 has a radio communication interface for transmitting/receiving radio waves in the 2.45-GHz band to/from the PC 1, in addition to a radio communication interface for transmitting/receiving

radio waves in the 800-MHz band to/from the base station 3. The portable telephone 2 also has an LCD for displaying data, a key operation portion for inputting data, and the like.

[0025] The PC 1 and portable telephone 2 are connected to each other through radio waves in a specific frequency band which are different from the radio waves used in the portable telephone system. More specifically, a 2.45-GHz band Bluetooth system is used. The Bluetooth system is a short-range radio communication standard, and implements radio communication within about 10 m by using radio waves in the 2.45-GHz band.

[0026] The PC 1 includes an antenna portion for transmitting/receiving radio waves in the 2.45-GHz band to/from the portable telephone 2, an LCD used as a display monitor, a keyboard for inputting data, and the like.

[0027] The hardware and software arrangements of the PC 1 and portable telephone 2 will be described below separately.

(Arrangement of Personal Computer)

[0028] FIG. 3 is a block diagram showing the hardware arrangement of the PC 1. The hardware portion required to implement this system will be mainly described below.

[0029] The PC 1 incorporates a radio communication module 7 for communicating with the portable telephone 2 by using radio waves in the 2.45-GHz band. The radio communication module 7 includes an antenna section 8, an RF (Radio Frequency) section 9, a baseband section 10, a memory section 11, a quartz oscillation section 12, an AD/DA conversion section 13, and a microphone/speaker section 14. A similar radio communication module is also incorporated in the portable telephone 2. The radio communication module 7 is connected to a computer engine section 15 as a main unit of the personal computer through a serial interface 16 such as a USB.

[0030] The antenna section 8 is a section that implements radio communication with the portable telephone 2 and transmits/receives radio waves in the 2.45-GHz band. In the reception mode, the RF section 9 mixes the radio wave received through the antenna section 8 with a fundamental frequency signal oscillated by the quartz oscillation section 12 to convert the radio wave into an intermediate frequency signal, and then demodulates it into a digital signal that can be processed by the baseband section 10. The baseband section 10 performs protocol processing. The signal input through the antenna section 8 and RF section 9 is converted into a data string that can be processed by the CPU in the baseband section 10.

[0031] In the transmission mode, in a reverse procedure to that in the reception mode, the baseband section 10 converts transmission data into a signal that can be processed by the RF section 9 in accordance with a predetermined protocol, and the RF section 9 modulates

the signal into a radio wave in the 2.45-GHz band, thereby transmitting it from the antenna section 8.

[0032] The microphone/speaker section 14 is a device for inputting/outputting speech signals, and is connected to the baseband section 10 through the AD/DA conversion section 13.

[0033] The computer engine section 15 has an MPU (computer engine) 17 including a CPU, memory, and peripheral control circuits, an LED (Light Emitting Diode) 18 for performing alarm display and the like, a USB interface 19 for connecting a peripheral device based on USB (Universal Serial Bus) standards, an LCD (Liquid Crystal Display) 20 used as a display monitor, a keyboard 21 for data input, PCMCIA (Personal Computer Memory Card International Association) interface 22 for mounting a PC card, and the like.

[0034] FIG. 4 is a block diagram showing the software arrangement of the PC 1. FIG. 4 shows the structure of the PC 1 incorporating a radio communication protocol stack for 2.4-GHz band radio communication on the computer engine section 15 side.

[0035] On the radio communication module 7 side of the PC 1, as shown in FIG. 4, the RF section 9 and baseband section 10, which are hardware, are provided, and an LMP (Link Management Protocol) 23 for controlling a radio link with the radio communication apparatus on the portable telephone 2 side by radio waves and an HCI (Host Control Interface) 24 for performing serial interface processing for the computer engine section 15 are incorporated in the baseband section 10.

[0036] The computer engine section 15 incorporates a 2.45-GHz band radio communication protocol stack 28, an HCI 29 for performing serial interface processing on the radio communication module 7 side, and the like, in addition to an OS (Operating System) 25, drive software 26 for controlling various peripheral devices, and various applications 27 such as wordprocessor software, spreadsheet software, electronic mail software, and system software for implementing a remote control function, which are incorporated as standard software for the PC.

(Arrangement of Portable Telephone)

[0037] FIG. 5 is a block diagram showing the hardware arrangement of the portable telephone 2. The hardware portion required to implement this system will be mainly described.

[0038] As a radio communication module 30 for communicating with the PC 1 by using radio waves in the 2.45-GHz band, an antenna section 31, RF section 32, baseband section 33, memory section 34, and quartz oscillation section 35 are incorporated in the portable telephone 2. The radio communication module 30 and a portable telephone engine section 36 are connected to each other through a serial interface 37.

[0039] The antenna section 31 is a section for transmitting/receiving radio waves in the 2.45-GHz band to

implement radio communication with the PC 1. In the reception mode, the RF section 32 mixes the radio wave received through the antenna section 31 with a fundamental frequency signal oscillated by the quartz oscillation section 35 to convert the radio wave into an intermediate frequency signal, and then demodulates it into a digital signal that can be processed by the baseband section 33. The baseband section 33 performs protocol processing. The signal input through the antenna section 31 and RF section 32 is converted into a data string that can be processed by the CPU in the baseband section 33.

[0040] In the transmission mode, in a reverse procedure to that in the reception mode, the baseband section 33 converts transmission data into a signal that can be processed by the RF section 32 in accordance with a predetermined protocol, and the RF section 32 modulates the signal into a radio wave in the 2.45-GHz band, thereby transmitting it from the antenna section 31.

[0041] The portable telephone engine section 36 includes an LCD 43 for data display, a key operation section 44 for data input, an LED 45 for alarm display and the like, a memory 46 for data storage, and the like, in addition to an antenna 40 for a portable telephone, an RF section 41, and a baseband section 42.

[0042] As a common section 47, an AD/DA conversion section 48, microphone/speaker 49, and power supply section 50 are provided.

[0043] FIG. 6 is a block diagram showing the software arrangement of the portable telephone 2. FIG. 6 shows the structure of the portable telephone 2 in which a radio communication protocol stack for 2.45-GHz band radio communication is mounted on the portable telephone engine section 36 side.

[0044] As shown in FIG. 6, the RF section 32 and baseband section 33, which are hardware, are arranged on the radio communication module 30 side of the portable telephone 2. An LMP (Link Management Protocol) 51 for controlling a radio link to the radio communication apparatus on the PC 1 side by radio waves and an HCI (Host Control Interface) 52 for performing serial interface processing for the portable telephone engine section 36 are mounted in the baseband section 33.

[0045] In addition to the RF section 41, the baseband section 42, and a portable telephone protocol stack 53, which are mounted as standard equipment for a portable telephone, the portable telephone engine section 36 incorporates an application 54 including system software and the like for implementing a remote control function, a radio communication protocol stack 55 for 2.45-GHz radio communication, and an HCI 56 for performing serial interface processing for the radio communication module 30 side.

(Optimization of Parameters for Connection Control)

[0046] Parameter optimization processing which is a feature of this embodiment will be described by exem-

plifying the case wherein the Bluetooth technique as a 2.45-GHz band radio communication standard is used. Bluetooth specifications will be briefly described first.

[0047] The Bluetooth system uses a frequency hopping technique of performing packet transmission of data by TDD (Time Division Duplex) with one slot corresponding to 625 μ s and a change in frequency in units of packets. By using the same frequency hopping sequence, a radio network called a piconet is formed between one master and a maximum of seven slaves to perform communication. Data channels (communication channels) include two types of channels, namely an asynchronous data channel (ACL) and synchronous speech channel (SCO). Data can be transmitted through one SCO at 64 kbps, and three SCOs can be simultaneously used.

[0048] According to the Bluetooth technique, if a terminal that wants to perform communication does not know the address of a remote terminal, Inquiry is executed to acquire information necessary for connection establishment (terminal search processing). This makes it possible to acquire the device addresses and clock information of all terminals that respond to the Inquiry. By using these pieces of information, connection can be actually established in the subsequent processing termed Page (connection establishment request processing). A given terminal that permits another terminal to search out (find) the given terminal itself performs Inquiry Scan (terminal search wait processing) to respond to an Inquiry message. A terminal in a connection establishment request wait state performs Page Scan (connection establishment request wait processing) to respond to Page.

[0049] FIG. 7 shows the arrangement of the PC 1 incorporating the Bluetooth system. An OS, Bluetooth bus driver, and application are resident on the memory of the PC 1 (host side), and the Bluetooth device itself (host controller side) is connected as, for example, a USB device. A host 101 and host controller 102 communicate with each other in accordance with an HCI (Host Controller Interface). The host controller 102 includes a link manager 103 and link controller 104. The operation of an RF circuit 105 is controlled by the link manager 103 and link controller 104.

[0050] To execute Inquiry, the host 101 transmits an HCI command to the host controller 102. An Inquiry command may be singly transmitted every time an application is to perform communication, or Inquiry may be periodically performed. When Inquiry is to be periodically performed, two parameters, Max_Period_Length and Min_Period_Length, used to determine the time intervals of Inquiry in an HCI command are set. The host controller 102 determines an arbitrary value in the range between the designated maximum value of Max_Period_Length and the designated minimum value of Min_Period_Length. Inquiry is performed every time interval corresponding to the determined value.

[0051] Max_Period_Length is defined to have a range

of 3.84 sec to 83884.8 sec. Min_Period_Length is defined to have a range of 2.56 sec to 83883.52 sec. In executing Inquiry Scan and Page Scan as well, the HCI command is transmitted to the host controller 102. In such a case, a parameter termed InquiryScan_Interval/PageScan_Interval for designating the time interval of Inquiry Scan/Page Scan must be set. InquiryScan_Interval/PageScan_Interval has a range of 11.25 ms to 2560 ms and a default value of 1.28 sec.

[0052] The link controller 104 has two major states, namely a standby state and connection state. The connection state includes four modes, namely an active mode, sniff mode, hold mode, and park mode. The sniff mode, hold mode, and park mode are power saving modes. If ACL connections are present in performing Inquiry, Inquiry Scan, or Page Scan, these ACL connections must be temporarily shifted to the park mode or hold mode, which is a power saving mode of a connection state to ensure an available slot for Inquiry, Inquiry Scan, or Page Scan. That is, data communication is temporarily stopped.

[0053] As is obvious from the above description of the Bluetooth specifications, a great loss is caused in terms of performance and power consumption if the time intervals of Inquiry, Inquiry Scan, and Page Scan remain unchanged. A feature of this embodiment is that such time intervals are optimized in accordance with the state of a device and the state of connection.

[0054] The bus driver converts data from an upper protocol driver into Bluetooth data and controls a Bluetooth link. FIG. 8 shows the arrangement of drivers and the flow of ACL/SCO data.

[0055] An upper layer which is an upper protocol driver of a bus driver 201 establishes ACL connection for each CID (logical channel ID). In the bus driver 201, an L2CAP (Logical Link Control and Adaptation Protocol) 202 establishes connection for each Connection Handle (CH) which is a physical channel identifier. An HCI driver 203 communicates HCI data packets to a USB driver 205, which serves to control the host controller 102, by using one transmission port and one reception port.

[0056] The bus driver 201 can therefore have communication traffic information, e.g., information indicating how many active ACL and SCO connections are currently established, a specific packet type used by each connection, and a specific speed of data transmission request from the upper layer. Since the HCI driver 203 can systematically monitor traffics, control can be performed in accordance with the traffic state of a current communication channel by using a data traffic monitor section & Inquiry/Inquiry Scan/Page Scan interval decision section 204.

[0057] Assume that no slot is available because of the establishment of a plurality of links, and a requested speed from the upper layer is high. In this case, the time interval of Inquiry Scan is set to be long, and Inquiry is not performed unless an application requests connection establishment. In addition, if no link is present, the

time intervals of Inquiry Scan and Page Scan are minimized to allow Inquiry Scan and Page Scan to be performed most frequently or Inquiry is periodically performed to acquire information about terminals within the communication zone in advance.

[0058] By determining the limits and time intervals of Inquiry, Inquiry Scan, and Page Scan in accordance with the data traffic amount in this manner, the use of the radio communication resource is optimized, and the communication performance can be improved.

[0059] The flow chart of FIG. 9 shows an example of Inquiry Scan Optimization Control Processing.

[0060] First of all, a data traffic is monitored (step S101). It is then checked whether the current traffic amount exceeds a predetermined threshold g , falls within the range of the threshold g to a threshold b ($b < a$), or is equal to or less than the threshold b (steps S102 and S103). If the traffic amount exceeds the threshold a (YES in step S102), the time interval of Inquiry Scan is set to a maximum value $X1$ to prevent communication performance from deteriorating due to Inquiry Scan (step S104). Likewise, if the traffic amount falls within the range of the threshold g to the threshold b (YES in step S103), the time interval of Inquiry Scan is set to an intermediate value $X2$ (step S105). If the traffic amount is equal to or less than the threshold b (NO in step S103), the time interval of Inquiry Scan is set to a minimum value $X3$ (step S106). In this case, $X1 > X2 > X3$.

[0061] The flow chart of FIG. 10 shows an example of Inquiry optimization control processing.

[0062] First of all, a data traffic is monitored (step S101). It is then checked whether the current traffic amount exceeds the predetermined threshold g , falls within the range of the threshold g to the threshold b ($b < a$), or is equal to or less than the threshold b (steps S102 and S103). If the traffic amount exceeds the threshold a (YES in step S102), the current mode is changed to a mode of stopping periodical transmission of Inquiry and issuing Inquiry only when an application or user requests the establishment of a new radio link in order to prevent communication performance from deteriorating due to Inquiry (step S107). If the traffic amount falls within the range of the threshold g to the threshold b (YES in step S103), the time interval of Inquiry is set to a predetermined value $Y1$ to periodically execute Inquiry (step S108). If the traffic amount is equal to or less than the threshold b (NO in step S103), the time interval of Inquiry is set to a minimum value $Y2$ (step S109). In this case, $Y1 > Y2$.

[0063] The control in FIG. 9 or 10 can be applied to Page Scan as well. In practice, various traffic states, e.g., whether current communication demands high communication performance and influences of a halt on current communication, are detected as well as the communication traffic amount, and appropriate control is executed in accordance with the detected states. (Second Example of Optimization of Parameters for Connection Control)

[0064] The second example of optimization control processing of this embodiment will be described next. In the above case, optimization control is performed on the basis of a traffic state. In some cases, the performance improves when control is performed in accordance with a user's use pattern. Assume that communication between PCs 1 or between the PC 1 and a PDA is to be started. In this case, if the user manually stops transmission by an application and performs Inquiry Scan and Page Scan instead of automatic execution of Inquiry Scan and Page Scan, a waste of the resource can be prevented. That is, the user or application can explicitly output an Inquiry Scan or Page Scan execution instruction. A specific example how such control becomes effective will be described.

[0065] Consider an application that performs communication upon establishing an ad hoc network by establishing a plurality of connections. In this case, a terminal that wants to join this network afterward must establish connection by performing Inquiry or Page with respect to the master of a piconet. In such an application model, the master should use available slots for Inquiry Scan and Page Scan as long as possible. The master of the piconet, however, serves as a server in this network. If many transmission requests are generated by the upper layer during communication with a plurality of slaves, a data overflow may occur in the bus driver 201, and the frequencies of execution of Inquiry Scan and Page Scan are suppressed. This may make it difficult for the terminal to join the network. That is, the operability of this application is poor.

[0066] Such a problem is prevented as follows. When the user designates the execution of Inquiry Scan/Page Scan, the application temporarily stops communication if data is being transmitted, and communicates with the bus driver 201 to instruct the execution of Inquiry Scan/Page Scan. By temporarily stopping the communication of the application, no overflow of transmission data occurs in the bus driver 201 even if data communication through a Bluetooth link is stopped for Inquiry Scan/Page Scan. FIG. 11 shows a user interface window for an ad hoc network application.

[0067] A member join button is prepared on this window. Assume that a given terminal is to join the network. In this case, the user presses this member join button on an application on a terminal serving as a master in a piconet of the network. At the same time, the application temporarily stops data transmission at a proper timing to allow execution of Inquiry Scan/Page Scan, or informs the lower bus driver 201 of the presence of a terminal that has established connection. As indicated by the flow in FIG. 7, the instruction is transmitted to the host controller 102, and the bus driver 201 transmits the HCI command to the host controller 102, thus instructing periodical execution of Inquiry Scan/Page Scan. If ACL connections are present, the host controller 102 shifts them to the park mode or hold mode and starts Inquiry Scan/Page Scan to quickly establish connection. The

host controller 102 then restores the ACL connections, which have been shifted to the power saving mode, to the active state to resume data communication.

[0068] By setting the timing and time interval of Inquiry Scan/Page Scan in accordance with an explicit instruction from the user, a deterioration in communication performance which is not intended by the user can be prevented. In addition, since control suitable for the operation of an application is performed, the overall performance of the system improves.

[0069] In addition, a terminal serving as a master is preferably made to preferentially execute either radio link establishment processing or data communication processing in accordance with a user operation by using a user interface window like the one shown in FIG. 12. If "data communication stop" or "terminal search priority" in FIG. 12 is selected, radio link establishment processing is preferentially performed. If "data communication priority" or "no terminal search" is selected, data communication processing is preferentially performed. A detailed control procedure will be described below with reference to the flow chart of FIG. 13.

[0070] First of all, the mode selected by the user is "data communication stop", "terminal search priority", "data communication priority", or "no terminal search" (steps S111 to S113). If "data communication stop" is selected (YES in step S111), the currently active link is set in the hold or park mode to temporarily stop communication (step S114). The time interval of Inquiry Scan is then set to the minimum value to quickly respond to a terminal search message (step S115). If "terminal search priority" is selected (YES in step S112), the time interval of Inquiry Scan is set to $X2$ ($X2 > \text{minimum value}$) to relatively quickly respond to a terminal search message (step S116).

[0071] If "data communication priority" is selected (YES in step S113), the time interval of Inquiry Scan is set to the relatively large value $X1$ ($X1 > X2$) to minimize the chance of interruption of data communication under execution (step S117). If "no terminal search" is selected (NO in step S113), the time interval of Inquiry Scan is set to the maximum value to exclusively use the radio communication resource for data communication (step S118).

[0072] With regard to the terminal that issues Inquiry, the time interval of Inquiry is variably controlled in accordance with the mode selected by the user. The time interval of Page Scan is also variably controlled by the same procedure as described above. (Third Example of Optimization of Parameters for Connection Control)

[0073] The third example of the optimization control processing of this embodiment will be described next. In this example, it is discriminated whether the PC 1 is driven on an external AC power supply or built-in battery. If the PC 1 is driven by the battery, the time interval of Inquiry Scan/Page Scan is set to be long, or Inquiry is issued only when a link request is received, thereby performing control for power saving. In addition, when the

PC 1 is driven by the battery, control is also performed to prolong the time interval as the battery residual capacity decreases.

[0074] A case wherein the bus driver 201 directly checks a battery residual capacity will be described first. FIG. 14 shows the power supply management software of this embodiment. Information associated with a battery, e.g., the residual capacity of the battery and information indicating whether the PC 1 is driven by the battery or external AC power supply, is managed in a system management memory (SMRAM) 304 under the control of a power supply management driver 302. An OS 303 and HCI driver 301 in the bus driver 201 have interfaces with the power supply management driver 302, and can check the current power supply state through the power supply management driver 302.

[0075] Assume that a capacity ratio (%) is to be calculated as a battery residual capacity. If the PC 1 is driven by the battery, the bus driver 201 reads out the capacity of the battery that was previously fully charged and the current capacity from the system management memory 304, and calculates a residual capacity C .

$C = \text{current residual capacity} / \text{capacity of battery fully charged previously}$

[0076] InquiryScan_Interval/PageScan_Interval can be set in increments of 0.625 ms according to the specifications. The time interval of Inquiry Scan/Page Scan is calculated by $0.625 \times N$. The default value of N is 2048, and the range of N is $18 \leq N \leq 4096$.

[0077] An equation that shortens the time interval of Inquiry Scan/Page Scan as C increases, and vice versa is exemplified below.

$$\text{InquiryScan_Interval} = 0.625 \times 2048 \times 1/C$$

If, however, $C \leq 0.5$,

$$\text{InquiryScan_Interval} = 2.56$$

[0078] If the battery residual capacity is 100%, the default value is 1.28 sec. If the battery residual capacity is 50% or less, the default value is 2.56 sec. The value calculated by such an equation is set as a parameter, and the HCI driver transmits the HCI command to the host controller 102. Either the HCI driver 301 in FIG. 15 or the power supply management driver 302 can have a calculation means.

[0079] In addition, information indicating that the battery driving mode and external power supply driving mode are switched is preferably registered in the OS 303 to allow acquisition of the information as an event. When these modes are switched, the OS 303 preferably informs the bus driver 201 of the information indicating the switching of the modes.

[0080] Instead of a direct check on a power supply state by the bus driver 201, an application program 401

for performing Bluetooth power supply control may be prepared as shown in FIG. 15, and the application program 401 may inquire the OS 303 about external power supply driving/battery driving and battery residual capacity in accordance with a request from the HCI driver 301 of the bus driver 201.

[0081] A procedure for performing optimization control processing in accordance with a power supply state will be described next with reference to the flow chart of FIG. 16. Inquiry Scan will be exemplified.

[0082] First of all, whether the current operating power supply is the battery or external AC power supply is determined by checking whether the external AC power supply is connected (step S201). If the external AC power supply is connected and the PC 1 is driven by the external AC power supply, the default value is used as the time interval of Inquiry Scan.

[0083] If no external AC power supply is connected and the PC 1 is driven by the battery (YES in step S201), the current battery residual capacity is checked (step S202). The time interval of Inquiry Scan is calculated from the battery residual capacity such that the time interval of Inquiry Scan prolongs with a decrease in battery residual capacity, and the time interval of Inquiry Scan is set to the calculated value (steps S203 and S204).

[0084] A similar procedure can be applied to Inquiry/Page Scan. In addition, Inquiry may be set to a mode of stopping periodical transmission when the battery residual capacity decreases below a predetermined value, and performing transmission only when a link request is received. The mode of performing transmission only when such a request is received can be applied to Inquiry Scan/Page Scan.

[0085] As described above, according to this embodiment, parameters for connection control can be optimized by dynamically controlling the execution timings and time intervals of Inquiry, Inquiry Scan, and Page Scan in accordance with a traffic state, user settings, and power supply state. This eliminates a waste of power and implements both an improvement in communication performance and connectability.

[0086] In this embodiment, parameter optimization control has been described above with particular emphasis on the PC 1. However, similar control can be applied to the portable telephone 2. In addition to PCs and portable telephones, the present invention can be applied to various electronic devices as long as they have communication apparatuses in which the radio communication resource is exclusively used between a communication channel and a control channel, and connection control is performed by inserting the control channel in the communication channel.

[0087] In this embodiment, control operations based on a traffic state, power supply state, and user settings have been separately described. However, a combination of these control operations can also be used. If, for example, the traffic is large, the time interval of connection control may be prolonged even in the AC power supply driving mode. In contrast to this, if the traffic is small, the time interval of connection control may be shortened even in the battery driving mode. In this manner, the time interval of connection control can be variously set in accordance with user settings.

[0088] As has been described in detail above, according to the present invention, parameters associated with connection control, e.g., the time interval of a terminal search and the time interval of terminal search wait processing, can be dynamically optimized, and hence an improvement in communication performance and suppression of power consumption can be realized.

Claims

1. A communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, said apparatus characterized by comprising:

means (1) for executing data transmission/reception using the communication channel;
means (1) for executing a control procedure required for establishment of a radio link using the control channel;
means (204) for monitoring a traffic of the communication channel; and
means (204) for dynamically controlling an execution timing or execution time interval of the control procedure on the basis of the traffic detected by said monitoring means (204).

2. The apparatus according to claim 1, characterized in that

said control procedure includes a procedure of transmitting a terminal search message for searching for a terminal in a communication zone and acquiring information necessary for connection, and
said control means (204) dynamically controls a transmission timing or transmission time interval of the terminal search message on the basis of the traffic detected by said monitoring means (204).

3. The apparatus according to claim 2, characterized in that said control means (204) inhibits periodical transmission of the terminal search message if the traffic detected by said monitoring means (204) exceeds a predetermined value, and permits transmission of the terminal search message only when establishment of a radio link is requested by a user application.

4. The apparatus according to claim 1, characterized in that

said control procedure includes a terminal search wait procedure for detecting a terminal search message transmitted from a remote terminal to search for a terminal and responding the message, and
said control means (204) dynamically controls execution time interval of the terminal search wait procedure on the basis of the traffic detected by said monitoring means (204).

5. The apparatus according to claim 1, characterized in that

said control procedure includes a connection establishment request wait procedure for detecting a connection establishment request message transmitted from a remote terminal, and
said control means (204) dynamically controls execution time interval of the connection establishment request wait procedure on the basis of the traffic detected by said monitoring means (204).

6. The apparatus according to claim 1, characterized in that

said control procedure executes one of a terminal search mode, a terminal search wait mode, and a connection establishment request wait mode, and
said control means (204) dynamically controls an execution timing or execution time interval of at least one of the terminal search mode, the terminal search wait mode, and the connection establishment request wait mode on the basis of the traffic detected by said monitoring means (204).

7. A communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, said apparatus characterized by comprising:

means (1) for executing data transmission/reception using the communication channel;
means (1) for executing a control procedure required for establishment of a radio link using the control channel;
user interface means (27) for setting preferentiality related to one of the data transmission/reception and the control procedure in accordance with a user operation; and
means (204) for controlling an execution timing

or execution time interval of the control procedure on the basis of a setting result of said user interface means (27).

8. The apparatus according to claim 7, characterized in that

said user interface means (27) sets one of a first mode of preferentially executing the data transmission/reception and a second mode of preferentially executing the control procedure, and

said control means (204) controls the execution timing or execution time interval of the control procedure in accordance with a mode set by said user interface means (27).

9. A communication apparatus capable of being driven by a battery and simultaneously connecting to a plurality of remote terminals, said apparatus characterized by comprising:

means (7) for periodically executing transmission processing of a terminal search message for searching for a remote terminal or terminal search wait processing for detecting the terminal search message and responding thereto;
means (302) for detecting a residual capacity of the battery; and
means (204) for dynamically controlling an execution timing or execution time interval of the transmission processing of the terminal search message or the terminal search wait processing on the basis of a detection result of said detection means (302).

10. The apparatus according to claim 9, characterized by further comprising:

means (302) for determining whether a current operating power supply is the battery or an external power supply; and
means (204) for dynamically controlling the execution timing or execution time interval of the transmission processing of the terminal search message or the terminal search wait processing on the basis of a determination result of said determining means (302).

11. A control method for a communication apparatus in which a communication channel and a control channel are exclusively assigned to a radio communication resource to be used, said method characterized by comprising the steps of:

executing data transmission/reception using the communication channel and executing a control procedure required for establishment of

a radio link using the control channel;
monitoring a traffic of the communication chan-
nel (S101); and
dynamically controlling an execution timing or
execution time interval of the control procedure
on the basis of the traffic detected in said mon-
itoring step (S102 to S106).

12. The method according to claim 11, characterized in
that

said control procedure executes one of a termi-
nal search mode, a terminal search wait mode,
and a connection establishment request wait
mode, and
said controlling step (S102 to S106) comprises
dynamically controlling an execution timing or
execution time interval of at least one of the ter-
minal search mode, the terminal search wait
mode, and the connection establishment re-
quest wait mode on the basis of the traffic de-
tected in said monitoring step.

13. A control method for a communication apparatus in
which a communication channel and a control chan-
nel are exclusively assigned to a radio communica-
tion resource to be used, said method characterized
by comprising the steps of:

executing data transmission/reception using
the communication channel and executing a
control procedure required for establishment of
a radio link using the control channel;
setting preferentiality related to one of the data
transmission/reception and the control proce-
dure in accordance with a user operation; and
controlling an execution timing or execution
time interval of the control procedure on the ba-
sis of a setting result in said setting step (S111
to S118).

14. The method according to claim 13, characterized
by further comprising the steps of:

setting one of a first mode of preferentially ex-
ecuting the data transmission/reception and a
second mode of preferentially executing the
control procedure; and
controlling the execution timing or execution
time interval of the control procedure in accord-
ance with a mode set in said setting step (S111
to S118).

15. A control method for a communication apparatus
capable of being driven by a battery and simultane-
ously connecting to a plurality of remote terminals,
said method characterized by comprising the steps
of:

detecting a residual capacity of the battery
(S202); and
dynamically controlling an execution timing or
execution time interval of transmission
processing of a terminal search message for
searching for a remote terminal or terminal
search wait processing for detecting the termi-
nal search message and responding to the
message on the basis of a detection result in
said detecting step (S203, S204).

16. The method according to claim 15, characterized
by further comprising the steps of:

determining whether a current operating power
supply is the battery or an external power sup-
ply (S201); and
dynamically controlling the execution timing or
execution time interval of the transmission
processing of the terminal search message or
the terminal search wait processing on the ba-
sis of a determination result in said determining
step (S202 to S204).

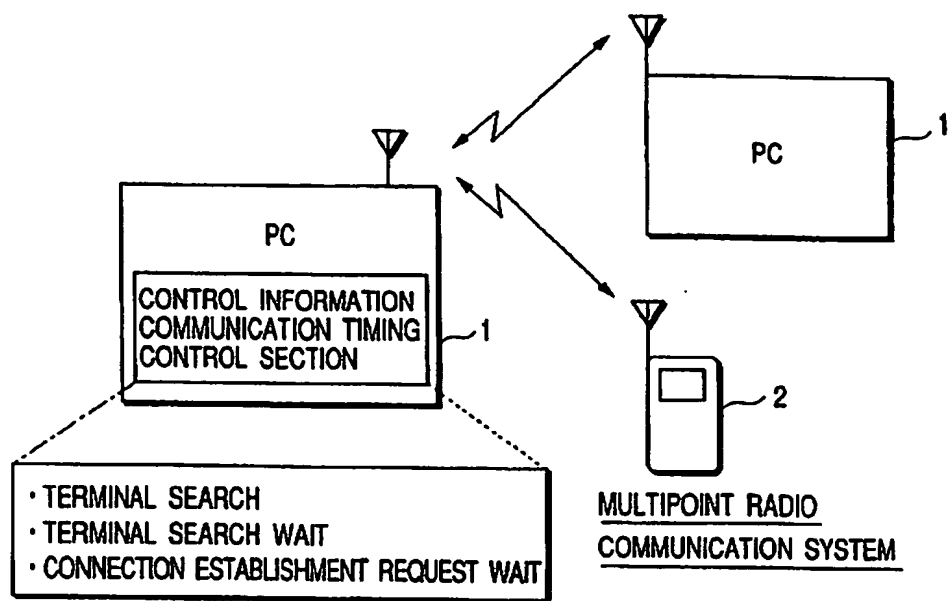


FIG. 1

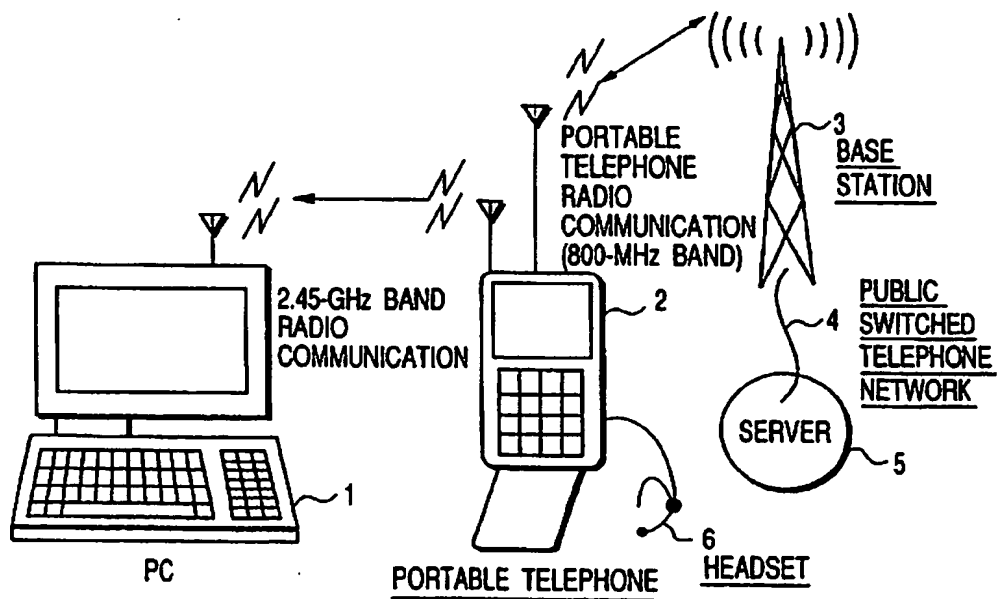


FIG. 2

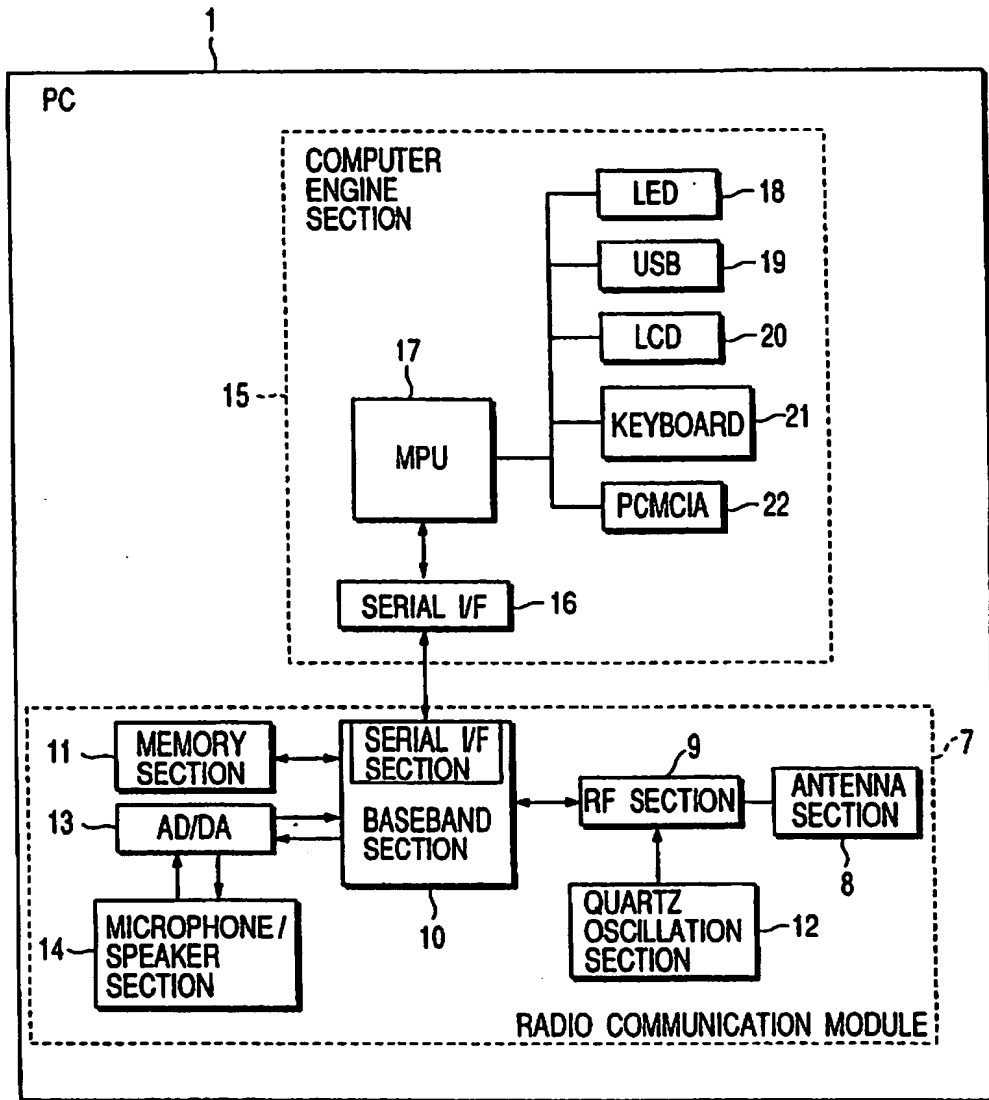


FIG. 3

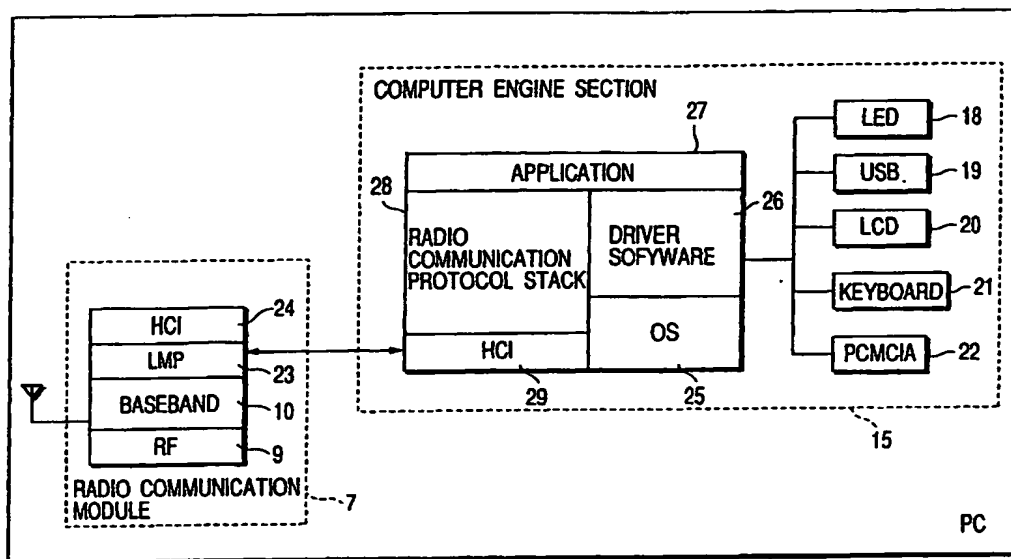


FIG. 4

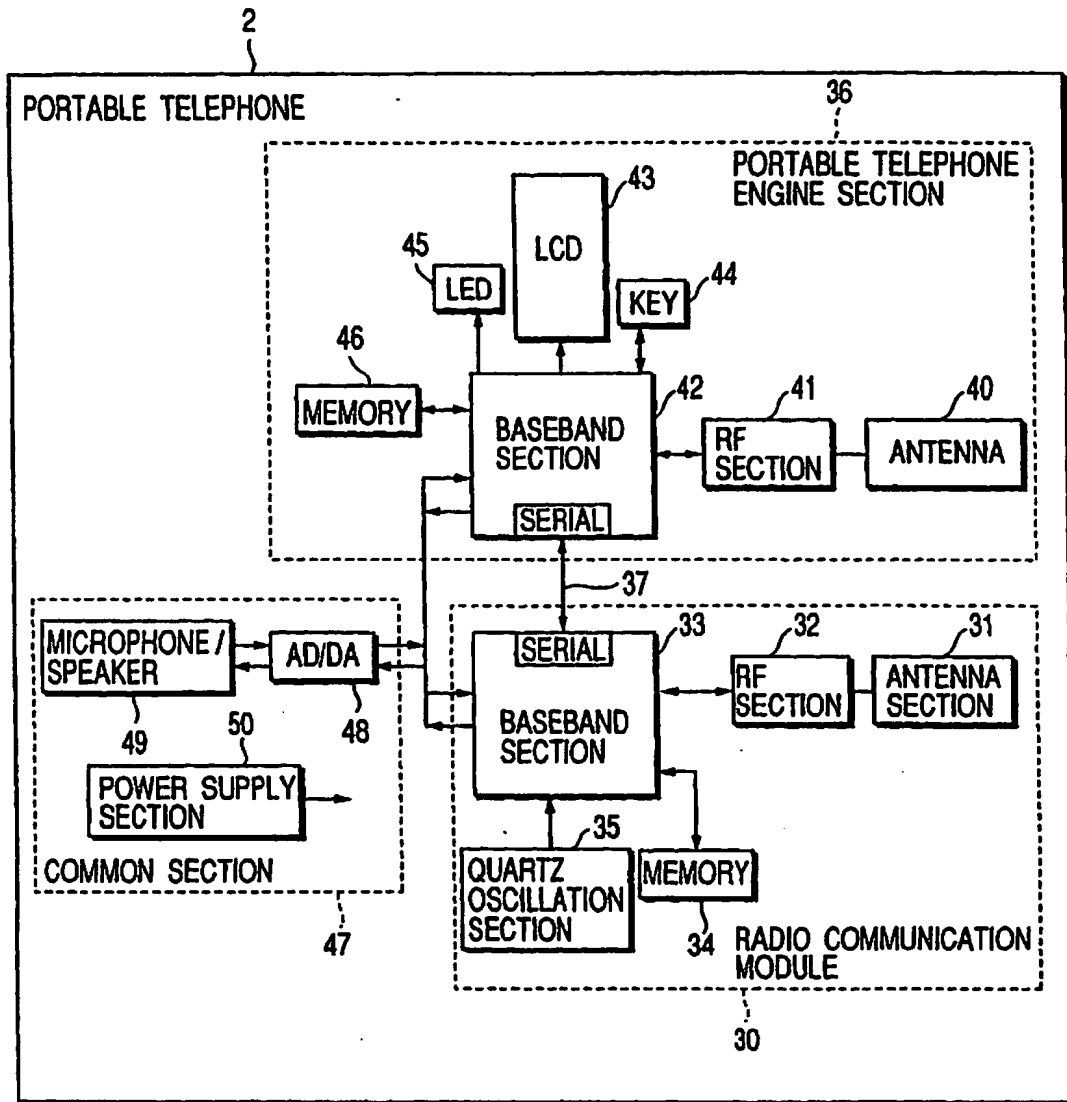


FIG. 5

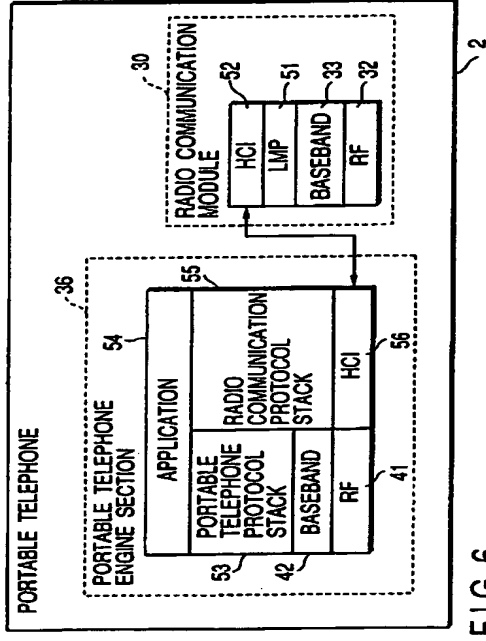


FIG. 6

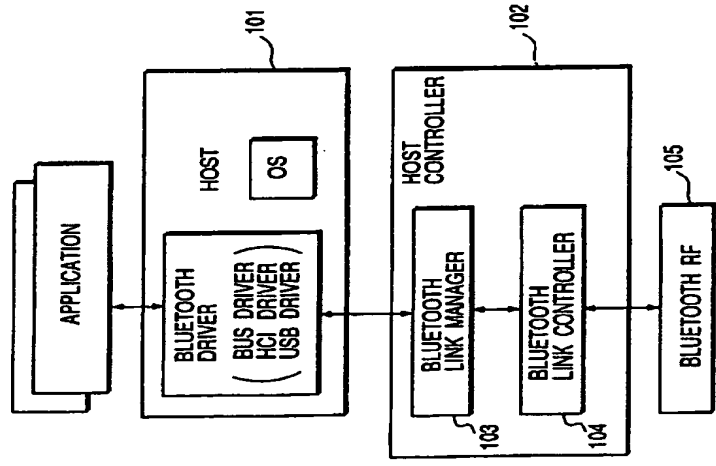


FIG. 7

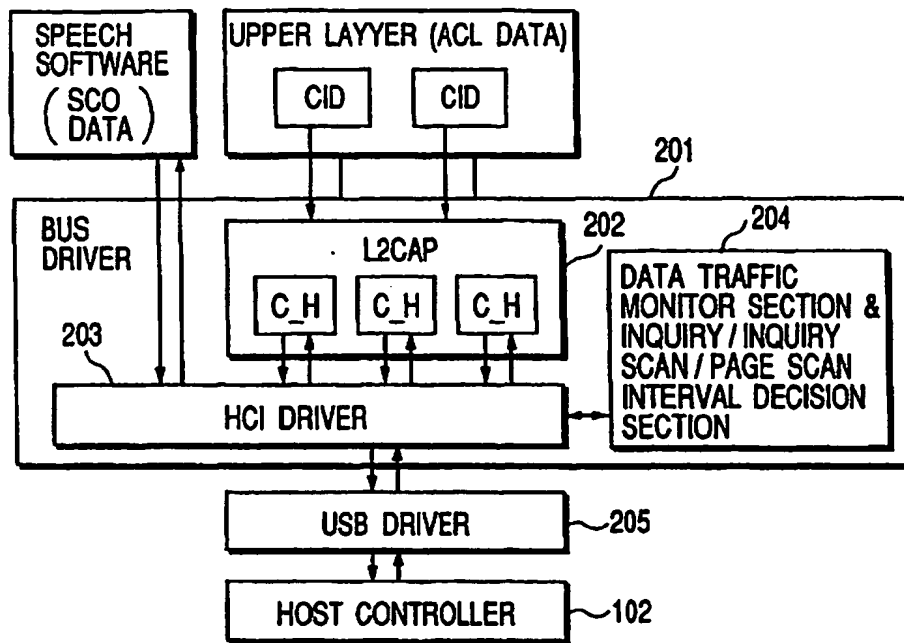


FIG. 8

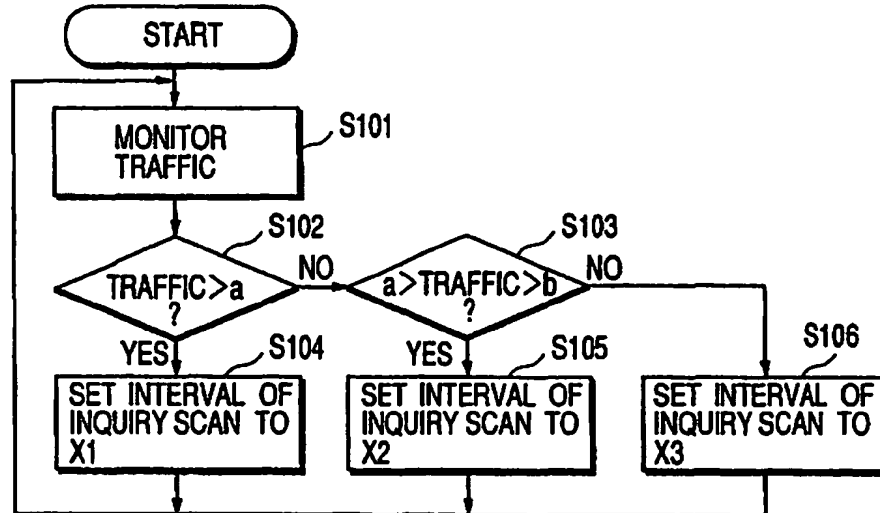


FIG. 9

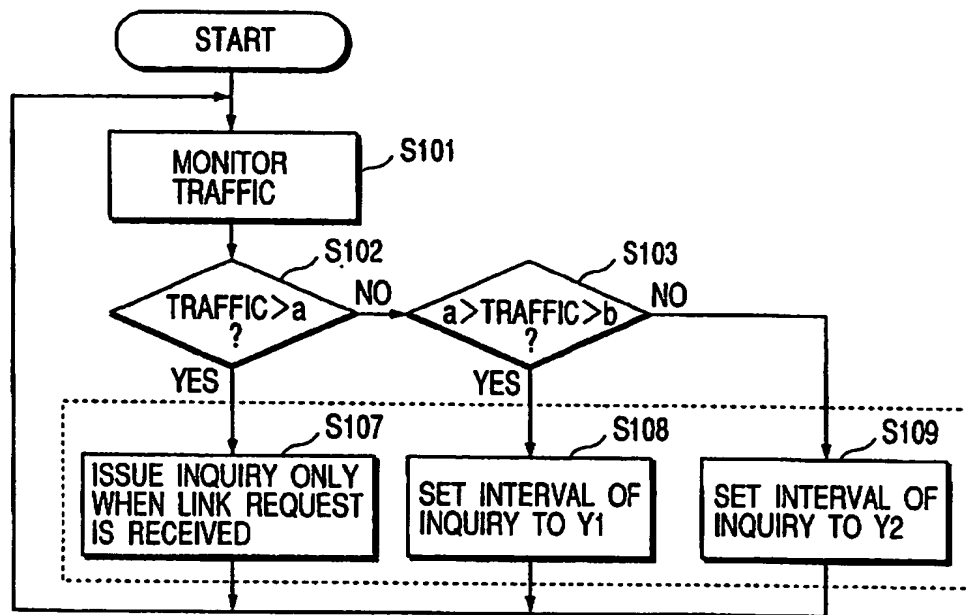


FIG. 10

MEMBER JOIN		
MEMBER	ADDRESS	MASTER
A	XXXXXX	SLAVE
B	YYYYYY	SLAVE
C	ZZZZZZZZ	

FIG. 11

- ☐ DATA COMMUNICATION STOP
- ☐ TERMINAL SEARCH PRIORITY
- ☐ DATA COMMUNICATION PRIORITY
- ☐ NO TERMINAL SEARCH

FIG. 12

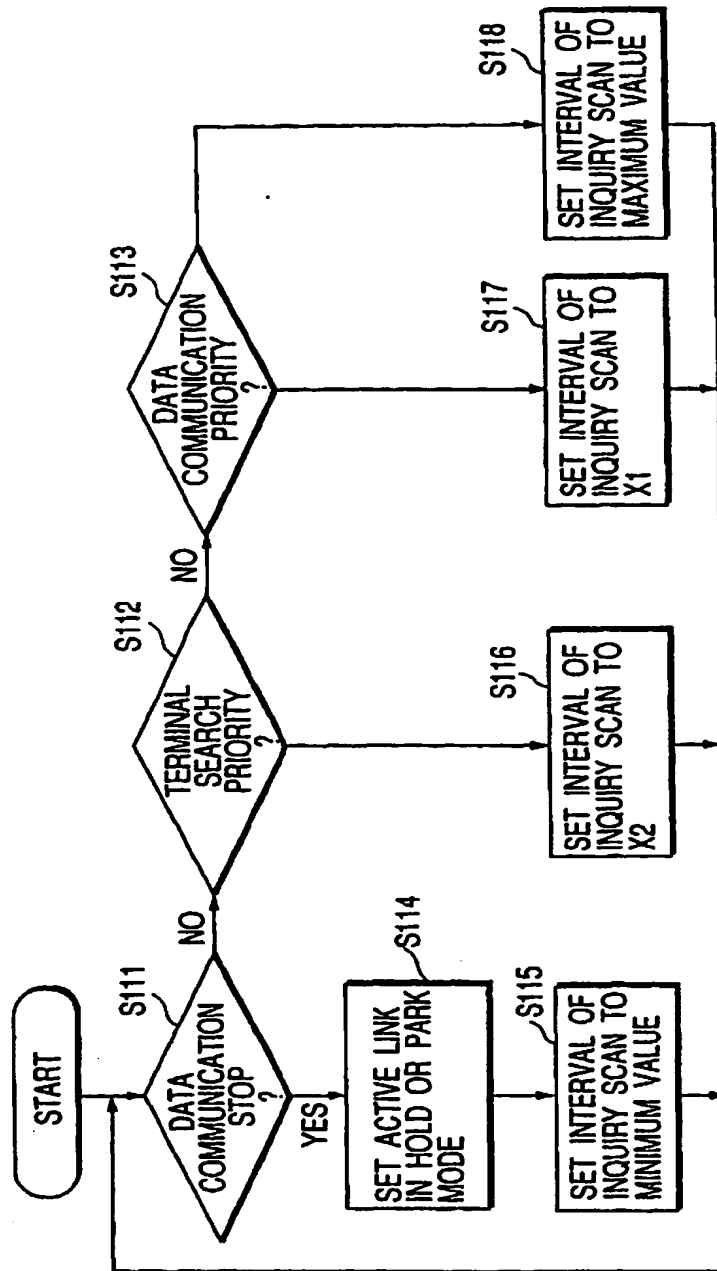


FIG. 13

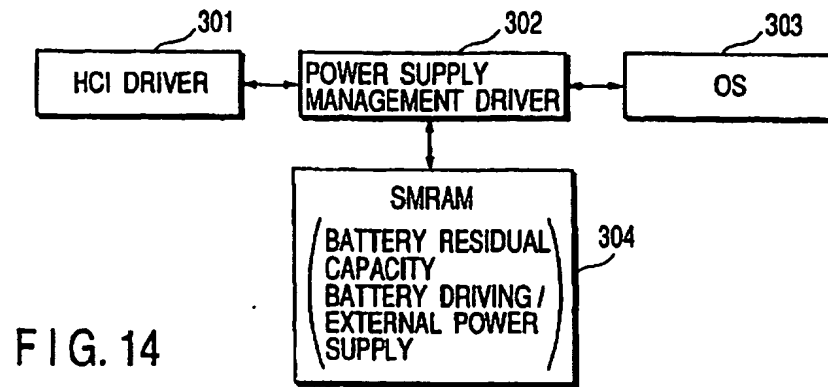


FIG. 14

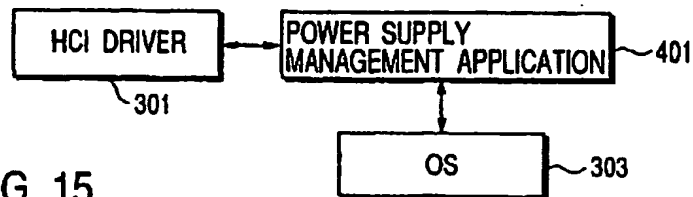


FIG. 15


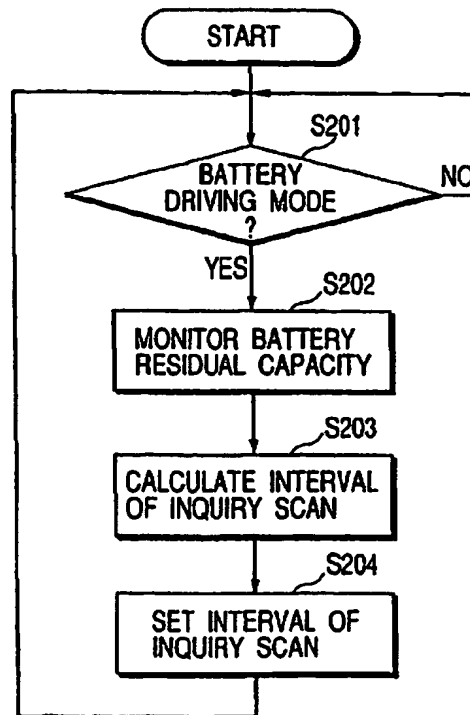


FIG. 16



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 113 690 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
11.09.2002 Bulletin 2002/37

(51) Int Cl.7: **H04Q 7/38**

(43) Date of publication A2:
04.07.2001 Bulletin 2001/27

(21) Application number: 00128628.5

(22) Date of filing: 28.12.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **KABUSHIKI KAISHA TOSHIBA**
Kawasaki-shi (JP)

(72) Inventor: Tada, Masahiro, c/o K. K. Toshiba
1-chome, Minato-ku Tokyo 105-8001 (JP)

(30) Priority: 28.12.1999 JP 37307399

(74) Representative: Henkel, Feller, Hänzel
Möhlstrasse 37
81675 München (DE)

(54) Communication apparatus and control method therefor

(57) A data traffic is monitored (S101), and the current traffic state is checked (S102, S103). If the traffic exceeds a threshold *a*, the time interval of Inquiry Scan is set to a maximum value *X1* to prevent communication performance from deteriorating due to Inquiry Scan

(step S104). Likewise, if the traffic falls in the range of the threshold *a* to a threshold *b*, the time interval of Inquiry Scan is set to an intermediate value *X2* (step S105). If the traffic amount is equal to or less than the threshold *b*, the time interval of Inquiry Scan is set to a minimum value *X3* (step S106).

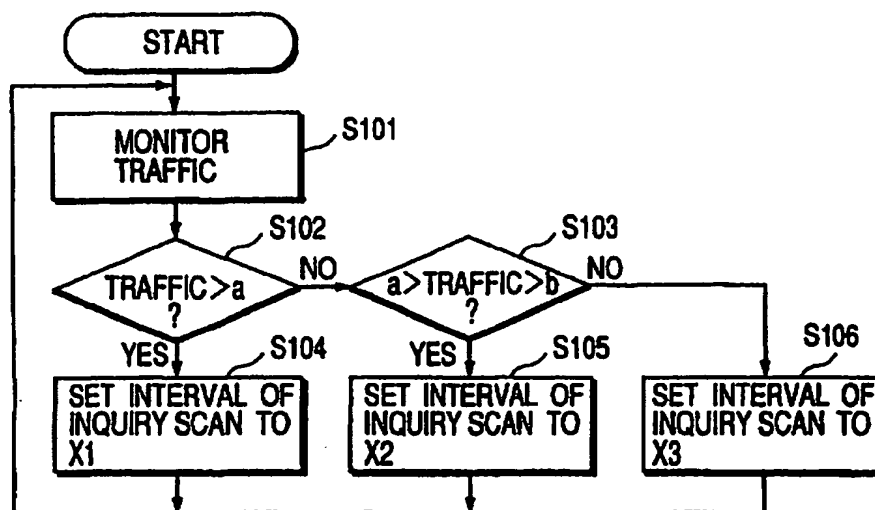


FIG. 9



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 12 8628

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 301 225 A (FURUYA TSUNEO ET AL) 5 April 1994 (1994-04-05) * column 2, line 31 - column 3, line 30 *	1,7,9, 11,13,15	H04Q7/38
Y	WO 99 22352 A (ROCKWELL SEMICONDUCTOR SYS INC) 6 May 1999 (1999-05-06) * page 6, line 30 - line 32 * * page 7, line 21 - line 31 * * page 19, line 16 - line 20 * * page 19, line 34 - line 36 *	1,11	
Y	GB 2 328 588 A (SAMSUNG ELECTRONICS CO LTD) 24 February 1999 (1999-02-24) * page 1, line 31 - page 2, line 29 * * page 4, line 1 - line 14 *	7,9,13, 15	
A	WO 98 27769 A (ERICSSON GE MOBILE INC) 25 June 1998 (1998-06-25) * abstract * * page 10, line 25 - line 30 *	1-16	
A	US 5 627 882 A (BUT CHIU-HONG ET AL) 6 May 1997 (1997-05-06) * column 3, line 20 - column 4, line 13 * * column 4, line 70 - column 5, line 9 *	1-16	
A	EP 0 711 089 A (MOTOROLA INC) 8 May 1996 (1996-05-08) * column 2, line 30 - line 41 *	1-16	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04B H04L
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 2 July 2002	Examiner Mele, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons B : member of the same patent family, corresponding document			

EPO FORM 120 (01.02.02) (P01001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 8628

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-07-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5301225	A	05-04-1994	JP	2796464 B2	10-09-1998
			JP	5183487 A	23-07-1993
WO 9922352	A	06-05-1999	US	6044069 A	28-03-2000
			WO	9922352 A1	06-05-1999
GB 2328588	A	24-02-1999	KR	234132 B1	15-12-1999
			CN	1212597 A	31-03-1999
			JP	11127110 A	11-05-1999
WO 9827769	A	25-06-1998	US	5991635 A	23-11-1999
			AU	739309 B2	11-10-2001
			AU	5525798 A	15-07-1998
			BR	9713960 A	11-04-2000
			CN	1247674 A	15-03-2000
			EP	0947116 A2	06-10-1999
			WO	9827769 A2	25-06-1998
US 5627882	A	06-05-1997	EP	0627836 A2	07-12-1994
			JP	6350508 A	22-12-1994
			SG	52448 A1	28-09-1998
EP 0711089	A	08-05-1996	EP	0711089 A2	08-05-1996
			AT	206577 T	15-10-2001
			DE	69033819 D1	08-11-2001
			DE	69033819 T2	25-04-2002
			EP	0435964 A1	10-07-1991
			JP	3505273 T	14-11-1991
			JP	3093258 B2	03-10-2000
			WO	9010987 A2	20-09-1990
			US	5128938 A	07-07-1992

EPO FORM P439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82